

JL
JEROME LEMARS

The Suerat Collection

Case Size – 45MM

Lug Width – 22MM

Movement – VD57- Japan Chronograph

Case Material – Stainless steel

Band Material – Stainless steel with deployment buckle


Crystal- Sapphire dome with date magnification

Water resistant- 50 Meter water resistant

SERVICE AND REPAIRS

Jerome Lemars timepieces are covered under a 2-year warranty. Your Jerome Lemars warranty is valid from the date of purchase with a valid accompanying proof of purchase. The warranty covers any defect to the materials and craftsmanship including the timepiece movement. This warranty does not cover damage to the glass, bracelet, strap, stem, crowns, battery or any attachments from accidents or misuse.

3 EYE CHRONOGRAPH (1/10TH SEC) WITH DATE

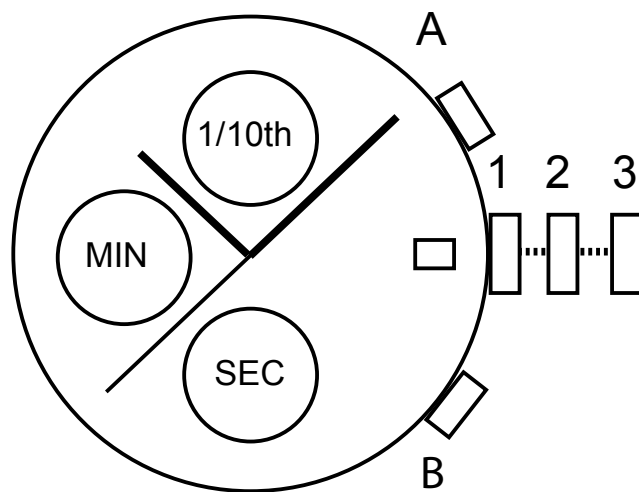

** Chronograph timing up to 60 minutes including 1/10th of a second.*

3 EYE CHRONOGRAPH (1/10TH SEC) WITH DATE

Resetting the chronograph function:

- Before setting the time please check that all chronograph hands are at the "0"/12 o'clock position.
- To reset the hands to the "0"/12 o'clock position press the buttons on your watch in the following sequence:
 1. If the chronograph is counting then press 'A' to stop the chronograph and then 'B' to reset back to "0".
 2. If split timing is displayed then press 'B' then 'A' followed by 'B' again to reset.

3 EYE CHRONOGRAPH (1/10TH SEC) WITH DATE

Setting the Time:

** The chronograph measurement must be stopped before the time can be set.*

1. Pull the crown out to position '2'.
2. Turn the crown clockwise until the previous date is displayed.
3. Now pull the crown out to position '3' and adjust the hands to the desired time.
4. Push crown back to position '1'.

** Do not attempt to set the date between 9:00 PM and 1:00 AM as the date change cycle is already in progress.*

3 EYE CHRONOGRAPH (1/10TH SEC) WITH DATE

Using the stop watch/chronograph feature:

** The chronograph measurement can time up to 60 minutes.*

- Standard measurement:
 1. Press 'A' to start the chronograph timing, then press 'A' to stop the timing.
 2. Press 'B' to reset the chronograph.
- Accumulated elapsed time measurement:
 3. Press 'A' to start timing, then press 'A' to stop the timing.
 4. Restart the timing by pressing 'A' as many times as required.
 5. Press 'A' to stop the chronograph and 'B' to reset.

3 EYE CHRONOGRAPH (1/10TH SEC) WITH DATE

Using the stop watch/chronograph feature continued:

** Split time measurement:*

1. Press 'A' to start the timing, then press 'B' to split the timing.
2. Press 'B' to release the timing as many times as required.
3. Press 'A' to stop the chronograph timing.
4. Press 'B' to reset the chronograph.